

OMAP35x™ Applications Processors



Product Bulletin

OMAP35x processors inspire new applications with unprecedented performance at handheld power levels

OMAP35x processors are the first to market with the high-performing ARM® Cortex™-A8 core offering 600 MHz for four times performance improvements over today's ARM9 devices. These applications processors offer the industry's best combination of general-purpose, multimedia and graphics processing in any single-chip combination and will allow OEMs to redefine the standards for advanced user interfaces, web browsing, productivity, enhanced graphics and the multimedia experience.


The best general-purpose, multimedia and graphics in any combination

The OMAP™ platform offers four different combinations of the ARM Cortex-A8 core, multimedia rich peripherals, OpenGL® ES 2.0 compatible graphics engine and DaVinci™ technology for applications incorporating video. Rich peripherals and display subsystems allow for seamless connectivity for lower bill of materials cost and reduced board footprint and power usage. With pin-for-pin compatibility, OMAP35x processors minimize development costs by leveraging software and hardware reuse. The OMAP35x generation of processors includes:

Key Features:

- Applications processors based on the superscalar ARM® Cortex™-A8 core offering 4× performance over ARM9 devices
- Scalable platform of processors available with multimedia rich peripherals, OpenGL ES 2.0 compatible graphics engine, and DaVinci™ technology for digital video capabilities
- Optimized laptop-like performance at handheld power levels in a single chip
- Utilize TI's SmartReflex™ technology for even greater power savings
- Evaluation module, Linux board support package and OMAP Developer Network help take designs from concept to production quickly and efficiently

▼ A detailed block diagram of the OMAP3530 processor.

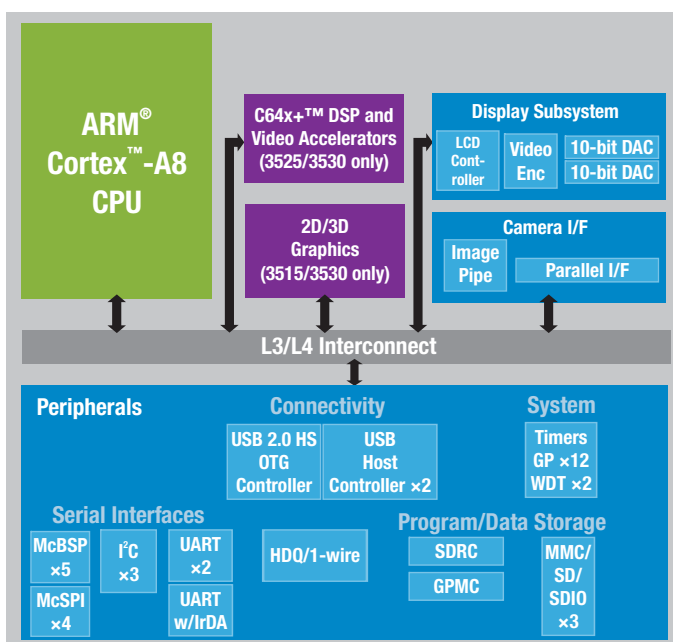

- **OMAP3503** – The OMAP3503 processor features a 600-MHz ARM Cortex-A8 along with a rich set of peripherals and memory. With 1200 Dhrystone MIPS performance, the OMAP3503 processor can run operating systems, such as Windows® CE and Linux and will allow faster boot times, web browsing and compelling Java applications.
- **OMAP3515** – The OMAP3515 processor consists of the same peripheral set and

ARM core as the OMAP3503 processor with the addition of the first broadly available, integrated OpenGL ES 2.0 graphics engine. The OMAP3515 processor can achieve PC gaming quality graphics, making it the processor of choice for embedded gaming or simple portable navigation systems. Based on Imagination Technologies PowerVR SGX graphics accelerator, the OMAP3515 processor brings photorealistic graphics to handheld devices.

- **OMAP3525** – The OMAP3525 processor has the same features as the OMAP3503 processor with the addition of integrated DaVinci technology for audio, video and imaging and multimedia acceleration capabilities. Integrated DaVinci technology combined with hardware-enabled video

and image processing as well as dedicated video-centric peripherals allows the OMAP3525 processor to decode up to high-definition video at MPEG-4 SP at 720p, 30 fps, all at under 500 mW.

- **OMAP3530** – The OMAP3530 processor brings all the features of the OMAP3503, 3515 and 3525 processors together on one chip. With an integrated ARM®, DSP, graphics engine, DaVinci™ technology and a rich peripheral set, the OMAP3530 processor brings high performance and power efficiency to productivity and entertainment applications.

TI's SmartReflex™ technologies

TI's SmartReflex Power and Performance Management Technologies reduce power consumption and optimized performance. SmartReflex technologies are a broad range of intelligent and adaptive hardware and software techniques that dynamically control voltage, frequency and power based on device activity, modes of operation and temperature.


Complementary analog

The TPS62350 is a high-frequency synchronous step-down DC/DC converter optimized for portable applications. Intended for low-power operation, the TPS62350 supports up to 800-mA load current and allows the use of tiny, low-cost inductors and capacitors. The TPS62350 operates at a 3-MHz fixed switching frequency, and enters into a power-save mode operation at light-load currents to maintain high efficiency over the entire load current range. The device's serial interface is compatible with fast/standard and high-speed mode I²C specification, allowing transfers at up to 3.4 Mbps.

Get started today with OMAP35x™ development tools

A complete set of development tools exist today to allow developers to get started now designing with OMAP35x processors.

- **OMAP35x Evaluation Module (EVM)** – provides all the components needed to begin developing today with the OMAP3503 processor. Featuring Linux Board Support Package based on 2.6.22 kernel, the OMAP35x EVM enables developers to start evaluating the capability of the OMAP3503 processor and begin software development now. The OMAP35x EVM includes the flexibility to develop application-specific daughter cards to prototype a complete system and the ability to update the processor as new devices become available.

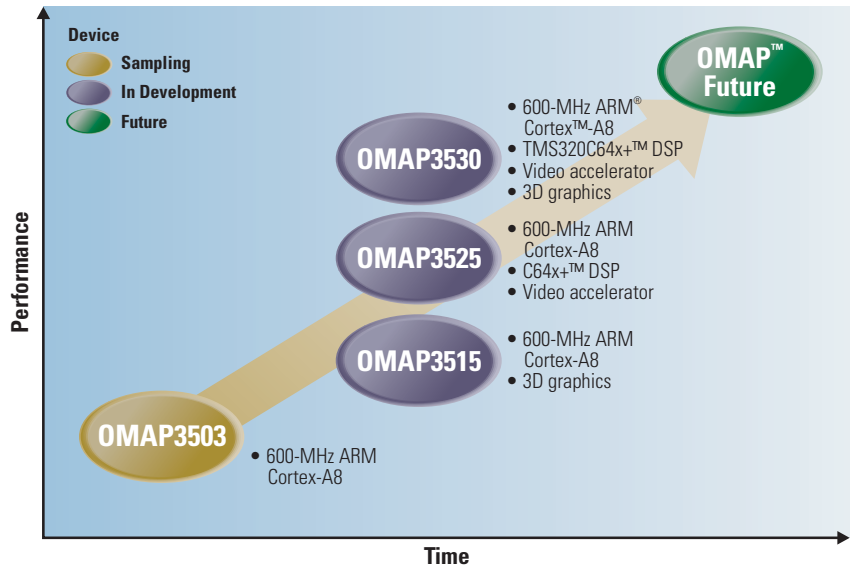

OMAP platform roadmap. ▲

- **OMAP™ Developer Network** – Along with the OMAP35x EVM, developers will have access to the proven and established ecosystem of the OMAP Developer Network. With more than 400 members, the OMAP Developer Network provides additional applications expertise and support to meet

the needs of every developer, from GUI to operating systems to networking capabilities.

For more information

Visit www.ti.com/omap35xpb for complete details on the OMAP35x applications processors.

TI Worldwide Technical Support

Internet

TI SC Product Information Center Home Page
support.ti.com
TI Semiconductor KnowledgeBase Home Page
support.ti.com/sc/knowledgebase

Product Information Centers

Americas

Phone +1(972) 644-5580
Fax +1(972) 927-6377
Internet/Email support.ti.com/sc/pic/americas.htm

Europe, Middle East, and Africa

Phone
European Free Call 00800-ASK-TEXAS (00800 275 83927)
International +49 (0) 8161 80 2121
Russian Support +7 (4) 95 98 10 701

Note: The European Free Call (Toll Free) number is not active in all countries. If you have technical difficulty calling the free call number, please use the international number above.

Fax +49 (0) 8161 80 2045
Internet support.ti.com/sc/pic/euro.htm

Japan

Fax International +81-3-3344-5317
Domestic 0120-81-0036
Internet/Email International support.ti.com/sc/pic/japan.htm
Domestic www.tij.co.jp/pic

Asia

Phone International +91-80-41381665
Domestic Toll-Free Number 1-800-999-084
Australia 800-820-8682
China 800-96-5941
Hong Kong 1-800-425-7888
India 001-803-8861-1006
Indonesia 080-551-2804
Malaysia 1-800-80-3973
New Zealand 0800-446-934
Philippines 1-800-765-7404
Singapore 800-886-1028
Taiwan 0800-006800
Thailand 001-800-886-0010
Fax +886-2-2378-6808
Email tiasia@ti.com
ti-china@ti.com
Internet support.ti.com/sc/pic/asia.htm

Important Notice: The products and services of Texas Instruments Incorporated and its subsidiaries described herein are sold subject to TI's standard terms and conditions of sale. Customers are advised to obtain the most current and complete information about TI products and services before placing orders. TI assumes no liability for applications assistance, customer's applications or product designs, software performance, or infringement of patents. The publication of information regarding any other company's products or services does not constitute TI's approval, warranty or endorsement thereof.

The floating bar, OMAP, OMAP35x and SmartReflex are trademarks of Texas Instruments. All other trademarks are the property of their respective owners.